



LOWE

WORLDWIDE REFRIGERATION



LOWE
REFRIGERATION INC.

Phone: 770 461 9001

Toll Free: 844.655.1320

Fax: 770 461 8020

105 Cecil Court • Fayetteville, GA 30214

Refrigerated

2 – 20

| | | | | | |
|----------------------|---|------------------------------|----|---------------------------|----|
| B Series | 2 | C Series | .9 | K Chillers | 16 |
| B – LG. | 3 | Genova. | 10 | K3T Chiller | 17 |
| B Corner. | 4 | Sara | 11 | K Wood Chillers | 18 |
| Jinny. | 5 | Mandy | 12 | H1 | 19 |
| P360° | 6 | Memphis | 13 | G223 | 19 |
| Oasis | 7 | Isola | 14 | Starlet. | 19 |
| F2 Chiller | 8 | G4T / G6T Chillers | 15 | Prep | 20 |

Bakery

21 – 25

| | | | | | |
|---------------------|----|---------------------|-----|---------------------|-----|
| B1P. | 21 | Victoria | .23 | L Harmony | .25 |
| Kubo 500R | 22 | L Symphony. | .24 | | |

Wine Display

26

| | |
|-----------------|----|
| Bodega. | 26 |
|-----------------|----|

Frozen

27 – 41

| | | | | | |
|---------------|----|----------------|-----|-------------------|-----|
| K1T. | 27 | E2. | .30 | DC8 | .37 |
| K4TF. | 27 | E3. | .31 | SS2P | .38 |
| VV17. | 28 | E4. | .32 | SS2P | .39 |
| K4T. | 28 | D1C | .33 | 200GBT | .40 |
| G1T. | 29 | KuboF. | .34 | H4IB. | .40 |
| G6FT. | 29 | B2F. | .35 | Penguin | .41 |
| E1 | 30 | F2. | .36 | H2 | .41 |

Hot

42 – 48

| | | | | | |
|--------------------|----|----------------|-----|-------------------|-----|
| Isola 4H | 42 | MCTM | .45 | DW | .47 |
| B1H | 43 | CO25 | .46 | 200 Hot | .48 |
| BR13H | 44 | MW. | .46 | HSD2 | .48 |
| MCT | 45 | Top2 | .47 | | |

Non Refrigerated

49 – 52

| | | | | | |
|------------------|----|---------------|-----|----------------|-----|
| I1. | 49 | MSU | .50 | SSB3 | .52 |
| I3. | 49 | HWS. | .50 | SSB1 | .52 |
| MS12 | 49 | PTS. | .51 | | |
| 200 Dry. | 49 | PT. | .51 | | |

Cold Rooms

53 – 57

| | | | | | |
|---------------------------------|----|----------------------------|-----|----------------------------|-----|
| Ready Built Cold Room | 53 | Modular Cold Room. | .55 | Modular Cold Room. | .57 |
| Modular Cold Room. | 54 | Modular Cold Room. | .56 | | |

Lowe Refrigeration, Inc opened in 1990 as an extension of our European Company for support of the trade show/convention industry in the United States. We have since provided our services beyond our **Contracted Shows** to include **Non-Contracted Shows and Special Events**. Lowe Refrigeration's equipment is housed in our Fayetteville, GA facility located approximately 20 miles south of Atlanta's Hartsfield Jackson International Airport. All orders are processed through this facility along with any required maintenance and repairs to our fleet of equipment. We have a complete inventory of spare parts and components which allows us to maintain the technical condition and cosmetic appearance of our equipment to the very high standards expected by our clients. With over 30 years of experience in refrigerations sales, exhibition, event, and corporate refrigeration rental, you can be certain that we will have the answers to all of your refrigeration requirements.

Services

Contracted Shows:

Since 1990, Lowe Refrigeration, Inc. has been the show appointed "refrigeration contractor" shipping refrigerated display cases to the major food tradeshow across the United States. Lowe Refrigeration's staff are always onsite to offer the technical support and service necessary to ensure the success of your display. Order forms and color brochures are included in the tradeshow kits and can also be found on the show website as well as the Lowe Refrigeration website under "Trade Show Order Forms".

Non-Contracted Shows:

For any size show, expo, convention, or meeting Lowe Refrigeration, Inc. can offer a complete selection of equipment. Non-contracted shows differ from contracted shows, hence in order for Lowe Refrigeration to offer our range for these types of events, we ask that the client cover 50% of the round trip freight. Equipment in small quantity is usually shipped crated to ensure safe arrival to the show as well as the return to Lowe Refrigeration without damage. This allows our clients to have access to our entire range in any quantity, anywhere in the United States. Equipment orders of a larger quantity will usually be shipped as a full truckload, and a staff member from Lowe Refrigeration will be onsite in order to assist in the unload and reload of the equipment. Therefore, if you have a need for equipment in relation to a non-contracted show, keep us in mind. Forms for these events can be faxed or emailed by request.

Special Events:

Following the popularity and success of the Modular Cold Rooms that have been utilized by our locations in Europe and Asia, we decided to introduce the very same to the sporting event/hospitality world in the United States. Modular Cold Rooms (Refrigerators or Freezers) are available, 8ft by 8ft size and multiples thereof, for short-term and long-term rentals. Clean, quiet, electric powered units ensure your equipment will be free of loud engine noise and diesel fumes. Perfect for any indoor or outdoor occasion - sporting events, catered events, carnivals, private gatherings, emergency refrigeration needs, and so much more. Our rental division (trade shows/conventions) compliments our support of the event industry by making available copious amounts of refrigerated display equipment found throughout this brochure.

Call with your request and we will provide the rental package to suit your needs. Lowe Refrigeration, Inc. will work with you to provide what you want, where you want, when you want it!

B Series



B - Back View

Features

- Automatic defrost
- Heater pan evaporation (no plumbing required)
- Built in preparation counter
- Castors supplied with case
- Easy to clean surfaces
- Forced air cooling
- Fully self contained unit
- Illuminated stainless steel display deck
- Rear access to display deck for server
- Refrigerated under-storage (accessed through rear doors with magnetic gaskets)
- Simple plug in operation
- Top hinged glass with hydraulic arm support for curved glass unit
- ABS foamed end walls
- Ice insert for fish display available upon request

* Display shelf available upon request (NOT refrigerated)

Specifications

Model Numbers

| | B1 | B2 | B3 |
|----------------------------------|------------------|------------------|------------------|
| Width (inches) | 51 | 75 | 98 |
| Depth (inches) | 43 | 43 | 43 |
| Height (inches) | 51 ½ | 51 ½ | 51 ½ |
| Width without end walls (inches) | 47 | 70 ¼ | 94 |
| Display area (square feet) | 11 | 16 ½ | 22 |
| Storage capacity (cubic feet) | 5 ½ | 8 ¼ | 10 ¾ |
| Storage area width (inches) | 47 | 70 ¼ | 94 |
| Storage area depth (inches) | 20 | 20 | 20 |
| Storage area height (inches) | 10 | 10 | 10 |
| Condensing unit size (HP) | 1/3 | 1/3 | ½ |
| Refrigerant | R404 | R404 | R404 |
| Power supply v/Hz/Ph | 120/60/1 | 120/60/1 | 120/60/1 |
| Amps | 20 | 20 | 20 |
| Watts | 2000 | 2000 | 2000 |
| Deck fans | 1 | 2 | 3 |
| Temp Range | 34/42°F or 1/6°C | 34/42°F or 1/6°C | 34/42°F or 1/6°C |

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

* Specifications subject to change without prior notice.

B - LG

Low Glass Option

Self Service



Features

- Automatic defrost
- Heater pan evaporation (no plumbing required)
- Built in preparation counter
- Castors supplied with case
- Easy to clean surfaces
- Forced air cooling
- Fully self contained unit
- Illuminated stainless steel display deck
- Rear access to display deck for server
- Refrigerated under-storage (accessed through rear doors with magnetic gaskets)
- Simple plug in operation
- Ice insert for fish display available upon request
- ABS foamed end walls



B - LG Back View

Specifications

Model Numbers

| | B1LG | B2LG | B3LG |
|----------------------------------|----------|----------|----------|
| Width (inches) | 51 | 75 | 98 |
| Depth (inches) | 43 | 43 | 43 |
| Height (inches) | 39 | 39 | 39 |
| Width without end walls (inches) | 47 | 70 ¼ | 94 |
| Display area (square feet) | 11 | 16 ½ | 22 |
| Storage capacity (cubic feet) | 5 ½ | 8 ¼ | 10 ¾ |
| Storage area width (inches) | 47 | 70 ¼ | 94 |
| Storage area depth (inches) | 20 | 20 | 20 |
| Storage area height (inches) | 10 | 10 | 10 |
| Condensing unit size (HP) | 1/3 | 1/3 | ½ |
| Refrigerant | R404 | R404 | R404 |
| Power supply v/Hz/Ph | 120/60/1 | 120/60/1 | 120/60/1 |
| Amps | 20 | 20 | 20 |

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

* Specifications subject to change without prior notice.



'B' Corner - Back View

B Corner
90° Corner



Features

- Automatic defrost
- Heater pan evaporation (no plumbing required)
- Built in preparation counter
- Castors supplied with case
- Easy to clean surfaces
- Forced air cooling
- Fully self contained 90° corner
- Ice insert for fish display available upon request
- Illuminated stainless steel display deck
- Rear access to display deck for server
- Simple plug in operation
- Top hinged glass with hydraulic arm support for curved glass unit

Specifications

Model Numbers



| | B Corner |
|----------------------------------|------------------|
| Width (inches) | 52 ½ |
| Depth (inches) | 52 ½ |
| Height (inches) | 50 ½ |
| Width without end walls (inches) | 50 |
| Display area (square feet) | 11 ½ |
| Condensing unit size (HP) | ½ |
| Refrigerant | R404 |
| Power supply v/Hz/Ph | 120/60/1 |
| Amps | 20 |
| Watts | 2000 |
| Deck fans | 2 |
| Temp Range | 34/42°F or 1/6°C |

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

* Specifications subject to change without prior notice.

Jinny

Jinny - Back View

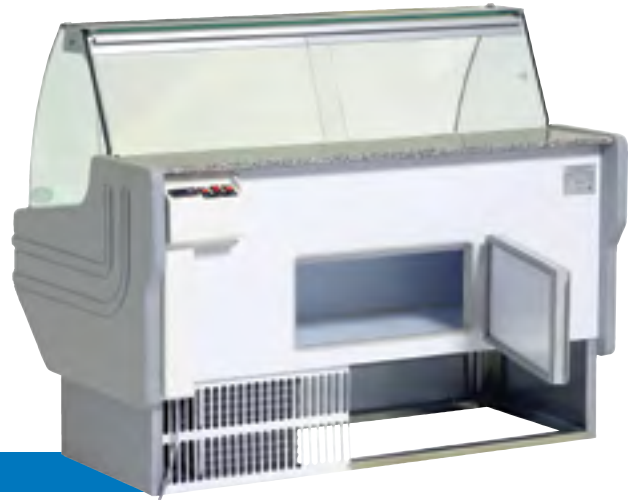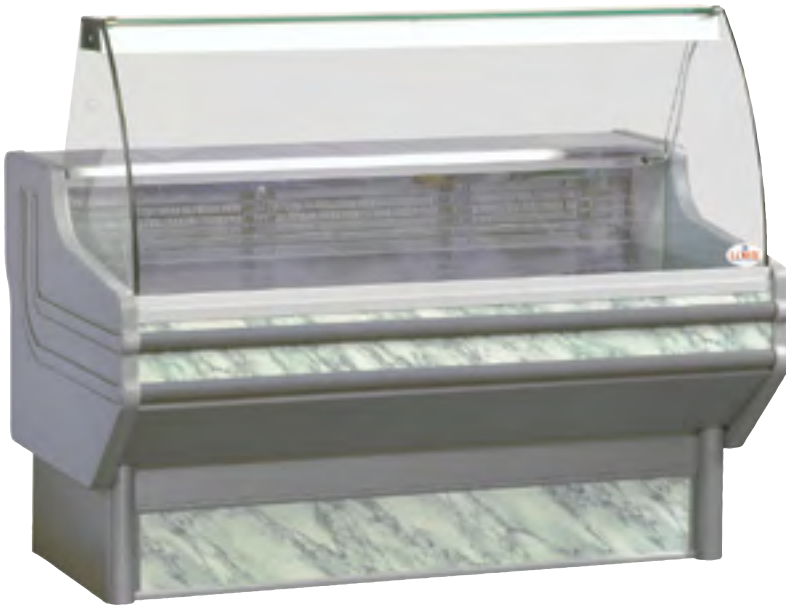

Features

- Bottom hinged glass
- Easy access for loading, setting of display and cleaning
- Simple disassembly for cleaning
- Castors supplied with case
- Euro style front and side glass
- Ice insert for fish display available upon request
- Illuminated stainless steel, display deck
- Rear access to the display for the server
- Under counter refrigerated storage
- Fully self contained unit
- Simple plug in operation
- Granite preparation counter built in
- Easy to clean surfaces and attractive lines
- ABS foamed end walls
- Magnetic door gasket for perfect seal
- Forced air cooling



J-150 Also Available In Black

Specifications

Model Numbers

| | J104 | J150 | J250 |
|----------------------------|------------------|------------------|------------------|
| Width (inches) | 41 | 59 | 99 |
| Depth (inches) | 36 ½ | 36 ½ | 36 ½ |
| Height (inches) | 50 ½ | 50 ½ | 50 ½ |
| Display area (inches) | 38 w x 26 ½ d | 55 ½ w x 26 ½ d | 95 ½ w x 26 ½ d |
| Display area (square feet) | 7 | 10 ¼ | 17 ½ |
| Condensing unit size (HP) | 1/3 | 3/8 | ½ |
| Refrigerant | R404 | R404 | R404 |
| Power supply v/Hz/Ph | 120/60/1 | 120/60/1 | 120/60/1 |
| Amps | 20 | 20 | 20 |
| Watts | 2000 | 2000 | 2000 |
| Temp Range | 34/42°F or 1/6°C | 32/42°F or 0/6°C | 32/42°F or 0/6°C |

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

* Specifications subject to change without prior notice.

P360°

Grab & Go Island



Features

- 360° product visibility
- Forced air system
- Castors supplied with case
- Stainless steel deck
- Protective bumpers
- European appearance
- Digital thermostat
- Suitable for all refrigerated products
- Gray bottom panels
- Simple plug in operation
- Ice insert for fish display available upon request

Specifications

Model Number

| | P360° |
|----------------------------|------------------|
| Width (inches) | 55 ½ |
| Depth (inches) | 47 |
| Height (inches) | 35 |
| Display area (square feet) | 12 ¼ |
| Condensing unit size (HP) | 1/3 |
| Refrigerant | R404 |
| Power supply v/Hz/Ph | 120/60/1 |
| Amps | 20 |
| Watts | 2000 |
| Deck fans | 2 |
| Temp Range | 36/50°F or 2/6°C |

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

* Specifications subject to change without prior notice.

Oasis

Sealed Deck, Suitable for Ice

Features

- Wooden finish
- Acrylic dome for 360° viewing
- Stainless steel display deck-sealed
- Suitable for ice
- Drain fitted
- Lid is raised electronically
- Self service with lid up
- Display with lid down
- Multipurpose display case
- Smooth finish and appearance
- Fully mobile
- Economical system
- Static evaporation system
- Very rapid pull down time
- Strong construction
- Efficient, quiet system
- Easy to clean surfaces and smooth lines
- Illuminated display
- Fully self contained
- Ozone friendly refrigerant
- Simple plug in operation with simple controls
- Thermostat control
- Operator friendly
- Castors supplied with case
- Spot display



Specifications

Model Numbers

| | Oasis 1 | Oasis 2 |
|----------------------------|-----------------------|-----------------------|
| Width (inches) | 43 | 55 |
| Depth (inches) | 43 | 55 |
| Height (inches) | 52 closed / 68 raised | 52 closed / 68 raised |
| Display area (square feet) | 10 ¼ | 17 ½ |
| Condensing unit size (HP) | 1/3 | 1/3 |
| Refrigerant | R134 | R134 |
| Power supply v/Hz/Ph | 120/60/1 | 120/60/1 |
| Amps | 20 | 20 |
| Watts | 2000 | 2000 |
| Deck fans | 2 | 2 |
| Temp Range | 34/42°F or 1/6°C | 34/42°F or 1/6°C |

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

* Specifications subject to change without prior notice.

F2 Chiller



Features

- Modern, state-of-the-art styling
- Wear resistant black vinyl coated steel exterior with all stainless steel countertop and slide lids for lifetime durability
- Heavy duty, long lasting galvanized steel interior
- Front, rear and side venting louvers allow greater condenser air flow for tight fit installations
- Easily accessible and serviceable slide out condensing unit
- Automatic, energy saving, non-electric condensate disposal system with easily accessible, front mounted cleanout drainage hose and drain pan
- High density, non-CFC polyurethane foamed-in-place insulation

Specifications

Model Number

F2 Chiller

| | |
|-------------------------------|------------------|
| Width (inches) | 64 |
| Depth (inches) | 27 ½ |
| Height (inches) | 37 |
| Inside Height (inches) | 27 |
| Inside Width (inches) | 60 |
| Inside Depth (inches) | 20 |
| Storage capacity (cubic feet) | 18 ¾ |
| Condensing unit size (HP) | 1/3 |
| Refrigerant | R134 |
| Power supply v/Hz/Ph | 120/60/1 |
| Amps | 20 |
| Watts | 2000 |
| Temp Range | 34/42°F or 1/6°C |

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

* Specifications subject to change without prior notice.

C Series

Euro Dairy/Deli Merchandiser

Adjustable Shelves

Features

- Open front – self service grab and go
- Easy access for loading and cleaning
- Excellent vision through attractively styled side glass
- White interior
- Four fully adjustable shelves
- Shelves can be angled
- Extra shelves available upon request
- Peg bars and pegs available upon request
- Energy saving self contained night blind
- Efficient, quiet system
- Castors supplied with case
- Fully self contained unit
- Simple plug in operation with simple controls
- No drain required (hot gas evaporation of defrost water)
- Impact resistant finish
- Pricing rails on each shelf
- Shelf product stoppers available upon request



Specifications

Model Numbers

| | C1 | C2 | C3 |
|----------------------------------|------------------|------------------|------------------|
| Width (inches) | 39 ¾ | 52 ¼ | 77 |
| Depth (inches) | 34 | 34 | 34 |
| Height (inches) | 84 | 84 | 84 |
| Width without end walls (inches) | 36 ¾ | 49 ½ | 73 ½ |
| Number of shelves | 4 | 4 | 4 |
| Shelf width x depth (inches) | 36 ¾ w x 17 ½ d | 49 ½ w x 17 ½ d | 73 ½ w x 17 ½ d |
| Display area (inches) | 36 ¾ w x 24 d | 49 ½ w x 24 d | 73 ½ w x 24 d |
| Display area (sq.ft.) | 18 ¼ | 24 | 36 ¼ |
| Condensing unit size (HP) | ¾ | ¾ | 1 ⅛ |
| Refrigerant | R404 | R404 | R404 |
| Power supply v/Hz/Ph (unit) | 120/60/1 | 120/60/1 | 120/60/1 |
| Amps (unit) | 20 | 20 | 20 |
| Watts (unit) | 2000 | 2000 | 2000 |
| Deck fans | 1 | 2 | 3 |
| Temp Range | 35/42°F or 2/6°C | 35/42°F or 2/6°C | 35/42°F or 2/6°C |

Unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

* Specifications subject to change without prior notice.

Genova

Open Front Merchandiser

Features

- Open front – self service grab and go
- Easy access for loading and cleaning
- White Interior
- Five fully adjustable shelves
- Additional shelves available upon request
- Peg bars and pegs available upon request
- Shelves can be angled
- Energy saving self contained night blind
- Efficient, quiet system
- Castors supplied with case
- Fully self contained unit
- Simple plug in operation with simple controls
- No drain required (hot gas evaporation of defrost water)
- Impact resistant finish
- Pricing rails on each shelf
- Glass or solid end walls
- Shelf product stoppers available upon request



Specifications

Model Numbers

| | Genova 1 | Genova 2 |
|----------------------------------|------------------|------------------|
| Width (inches) | 40 ½ | 52 ¾ |
| Depth (inches) | 35 ½ | 35 ½ |
| Height (inches) | 86 | 86 |
| Width without end walls (inches) | 37 | 49 ¼ |
| Number of shelves | 5 | 5 |
| Shelf width and depth (inches) | 36 ½ w x 17 ¾ d | 49 w x 17 ¾ d |
| Display area (inches) | 36 ½ w x 21 ¾ d | 49 w x 21 ¾ d |
| Display area (square feet) | 27 ½ | 37 |
| Condensing unit size (HP) | 1 | 1 |
| Refrigerant | R404 | R404 |
| Power supply v/Hz/Ph (unit) | 120/60/1 | 120/60/1 |
| Amps | 20 | 20 |
| Watts | 2000 | 2000 |
| Deck fans | 1 | 2 |
| Temp Range | 35/42°F or 2/6°C | 35/42°F or 2/6°C |

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

* Specifications subject to change without prior notice.

Sara

Open Front Merchandiser

Features

- Open Front – self service grab and go
- Easy access for loading and cleaning
- White interior
- 3 Fully adjustable shelves
- Additional shelves available upon request
- Peg bars and pegs available upon request
- Castors supplied with case
- Energy saving self contained night blind
- Efficient, quiet system
- No drain required
(hot gas evaporation of defrost water)
- Pricing rails on each shelf
- Fits through single door
- Forced air cooling
- Shelf product stoppers available upon request



Specifications

Model Number

Sara

| | |
|----------------------------------|------------------|
| Width (inches) | 52 ½ |
| Depth (inches) | 27 |
| Height (inches) | 69 |
| Width without end walls (inches) | 49 |
| Display area (square feet) | 16.88 |
| Top shelf (inches) | 49 w x 7 d |
| Middle shelf (inches) | 49 w x 10 d |
| Bottom shelf (inches) | 49 w x 14 d |
| Bottom Deck (inches) | 49 w x 18 ¾ d |
| Condensing unit size (HP) | ¾ |
| Refrigerant | R404 |
| Power supply v/Hz/Ph | 120/60/1 |
| Amps | 20 |
| Watts | 2000 |
| Deck Fans | 2 |
| Temp Range | 35/42°F or 2/6°C |

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

* Specifications subject to change without prior notice.



Mandy
Open Front Merchandiser
Black or White



Features

- Automatic defrost
- Castors supplied with case
- Easy to clean surfaces
- Fits through single door
- Forced air cooling
- Fully self contained unit
- Heater pan evaporation (no plumbing required)
- Illuminated top shelf
- Simple plug in operation
- Stainless steel shelves and display deck
- 3 shelves standard
- Energy saving self contained night blind

Specifications

Model Number

| | Mandy 100 |
|----------------------------------|--------------------|
| Width (inches) | 39 1/2 |
| Depth (inches) | 29 3/4 |
| Height (inches) | 52 |
| Width without end walls (inches) | 36 1/2 |
| Top shelf | 34 3/4 w x 8 1/4 d |
| Middle shelf (inches) | 34 3/4 w x 10 d |
| Bottom shelf (inches) | 34 3/4 w x 12 d |
| Bottom Deck (inches) | 35 1/4 w x 22 d |
| Display area (square feet) | 13 |
| Condensing unit size (HP) | 3/4 |
| Refrigerant | R404 |
| Power supply v/Hz/Ph | 120/60/1 |
| Amps | 20 |
| Watts | 2000 |
| Deck fans | 1 |
| Temp Range | 35/42°F or 2/6°C |

Plug - unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

* Specifications subject to change without prior notice.

Memphis



Non-Refrigerated

Features

- Grab and Go refrigerated lower section
- Non refrigerated upper section
- Lockable Castors
- Sliding rear doors on upper section
- Glass shelf in upper section
- Fully mobile
- Smooth end walls
- Available in Black or Bronze
- No drain required (hot gas evaporation of defrost water)
- Efficient, quiet system

Refrigerated

Specifications

Model Numbers

| | Memphis 90 | Memphis 120 |
|----------------------------|------------------|------------------|
| Width (inches) | 35 ½ | 47 ½ |
| Depth (inches) | 32 ¾ | 32 ¾ |
| Height (inches) | 56 ½ | 56 ½ |
| Display deck (inches) | 32 w x 22 d | 44 w x 22 d |
| Display deck (square feet) | 5 | 6 ¾ |
| Condensing unit size (HP) | ¼ | ¼ |
| Refrigerant | R404 | R404 |
| Power supply v/Hz/Ph | 20/60/1 | 120/60/1 |
| Amps | 20 | 20 |
| Watts | 2000 | 2000 |
| Deck Fans | 1 | 2 |
| Temp Range | 37/42°F or 3/6°C | 37/42°F or 3/6°C |

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

* Specifications subject to change without prior notice.

Isola

Features

- Internal basin in AISI stainless steel
- External in wood or stainless steel
- Gastronorm pans available upon request
- Different configurations available
- Pans available upon request
- Accepts deep or shallow pans
- Static refrigeration system
- Digital control panel
- Electronic lid for ease of loading/serving
- Castors supplied with case
- Serving trays optional
- LED lighting optional



Specifications

Model Numbers

| | Isola 4S/S | Isola 6 | Isola 6S/S |
|---------------------------|-------------------|-------------------|-------------------|
| Width (inches) | 59 ¼ | 81 ¼ | 86 |
| Depth (inches) | 29 ½ | 29 ½ | 29 ½ |
| Height (inches) top down | 45 | 45 ¼ | 45 |
| Height (inches) top up | 59 | 59 | 59 |
| Condensing unit size (HP) | ⅓ | ⅓ | ⅓ |
| Refrigerant | R134 | R134 | R134 |
| Powers supply v/Hz/Ph | 120/60/1 | 120/60/1 | 120/60/1 |
| Amps | 20 | 20 | 20 |
| Watts | 2000 | 2000 | 2000 |
| Temp range | 38/50°F or 3/10°C | 38/50°F or 3/10°C | 38/50°F or 3/10°C |

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight. **

* Specifications subject to change without prior notice.

G4T



G6T



Features

- For all chilled food products
- Fully self contained bottom mounted condensing unit
- Efficient, quiet system
- Fan assisted
- Automatic evaporator of defrost water
- Ozone friendly
- White interior and black exterior
- Full length internal vertical lights
- Sturdy handle
- Magnetic door gaskets
- Easy access for loading and cleaning
- Easy clean surfaces
- Illuminated canopy for graphics
- Fully adjustable shelves
- Four shelves per door
- Castors supplied with case
- Minimum maintenance
- Low energy consumption
- Double pane glass door(s)
- Self closing door(s)

Specifications

Model Numbers

| | G4T | G6T |
|------------------------------|------------------|------------------|
| Width (inches) | 30 | 54 ¼ |
| Depth (inches) | 28 ¼ | 28 ¼ |
| Height (inches) | 82 ½ | 82 ½ |
| Canopy dims (inches) | 26 ½ w x 5 ½ h | 52 w x 5 ½ h |
| Shelf width x depth (inches) | 23 w x 20 ½ d | 23 ½ w x 20 d |
| Number of shelves | 4 | 8 |
| Condensing unit size (HP) | ⅓ | ½ |
| Refrigerant | R134 | R134 |
| Power supply v/Hz/Ph (unit) | 120/60/1 | 120/60/1 |
| Amps | 20 | 20 |
| Watts | 2000 | 2000 |
| Temp Range | 34/42°F or 1/6°C | 34/42°F or 1/6°C |

Plug – each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

* Specifications subject to change without prior notice.

K Chillers

Features

- LED lighting
- Anodized gold or silver finish
- Automatic defrost
- Castors supplied with case
- Easy to clean surfaces
- Forced air cooling
- Fully self contained unit
- Glass on four sides (K2T & K2TF)
- Heater pan evaporation (no plumbing required)
- Illuminated display
- Rotating glass shelves (K2T) (mirrored bottom shelf)
- Rotation stops when door is opened
- Simple plug in operation

*K2TF: adjustable wire shelf version of K2T.
Shelf size (inches) 17 ½ x 17 ½

K2T



K2TF



Specifications

Model Numbers

| | K2T | K2TF |
|-----------------------------|-------------------|-------------------|
| Width (inches) | 23 ½ | 23 ½ |
| Depth (inches) | 24 | 24 |
| Height (inches) | 71 | 71 |
| Shelf dimensions (inches) | 16 ½ diameter | 17 ½ x 17 ½ |
| Number of shelves | 6 | 5 |
| Condensing unit size (HP) | ⅓ | ⅓ |
| Refrigerant | R134 | R134 |
| Power supply v/Hz/Ph (unit) | 120/60/1 | 120/60/1 |
| Amps | 20 | 20 |
| Watts | 2000 | 2000 |
| Evaporator fans | 1 | 1 |
| Temp range | 35/50°F or 4/10°C | 35/50°F or 4/10°C |

Plug – each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

* Specifications subject to change without prior notice.

K3T

Features

- LED lighting
- Anodized gold or silver finish
- Automatic defrost
- Castors supplied with case
- Easy to clean surfaces
- Forced air cooling
- Fully self contained unit
- Glass on six sides (K3T)
- Heater pan evaporation (no plumbing required)
- Illuminated display
- Rotating glass shelves (mirrored bottom shelf)
- Rotation stops when door is opened
- Simple plug in operation



Specifications

Model Number

| | K3T |
|-----------------------------|-------------------|
| Width (inches) | 31 ¾ |
| Depth (inches) | 36 |
| Height (inches) | 69 |
| Shelf diameter (inches) | 22 |
| Number of shelves | 5 |
| Condensing unit size (HP) | 7/8 |
| Refrigerant | R134 |
| Power supply v/Hz/Ph (unit) | 120/60/1 |
| Amps | 20 |
| Watts | 2000 |
| Evaporator fans | 1 |
| Temp range | 35/50°F or 4/10°C |

Plug – each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

* Specifications subject to change without prior notice.

Features

- Humidity controlled (K2TWCF, K2TWCR)
- Rotating or fixed glass shelves available
- Beautiful wood finish
- Castors supplied with case
- Economical system
- Glass on all four sides
- All around view of product
- Mirrored bottom shelf
- Adjustable shelves
- Strong construction
- Efficient, quiet system
- Easy to clean surfaces and lines
- Forced air system
- Illuminated display
- Fully self contained unit
- Ozone friendly refrigerant
- Simple plug in operation with simple controls
- Thermostat control
- Operator friendly
- Single door access
- Rotation stops when door is opened



Rotating Shelves

K2TWR

K2TWF



Fixed Shelves

Specifications

Model Numbers

| | K2TWF | K2TWR | K2TWCF | KWTWCR |
|------------------------------|-------------------|-------------------|--------------------|--------------------|
| Application | General | General | Chocolate | Chocolate |
| Humidity control | No | No | Yes | Yes |
| Width (inches) | 32 ½ | 32 ½ | 32 ½ | 32 ½ |
| Depth (inches) | 33 ½ | 33 ½ | 33 ½ | 33 ½ |
| Height (inches) | 72 | 72 | 72 | 72 |
| Shelves (fixed or rotating) | Fixed | Rotating | Fixed | Rotating |
| Shelf width x depth (inches) | 20 ½ w x 22 ½ d | ----- | 20 ½ w x 22 ½ d | ----- |
| Shelf diameter (inches) | ----- | 22 | ----- | 22 |
| Number of shelves | 5 | 6 | 5 | 6 |
| Condensing unit size (HP) | 1/3 | 1/3 | 1/3 | 1/3 |
| Refrigerant | R134 | R134 | R134 | R134 |
| Power supply v/Hz/Ph (unit) | 120/60/1 | 120/60/1 | 120/60/1 | 120/60/1 |
| Amps | 20 | 20 | 20 | 20 |
| Watts | 2000 | 2000 | 2000 | 2000 |
| Evaporator fans | 1 | 1 | 1 | 1 |
| Temp Range | 35/50°F or 4/10°C | 35/50°F or 4/10°C | 56/62°F or 14/16°C | 56/62°F or 14/16°C |

Plug – each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

* Specifications subject to change without prior notice.

H1

Features

- Storage Chiller
- Weighs 73 lbs



G223

Features

- 23 Liter Total Capacity
- 11.5 Liters Per Bowl
- 6.34 Gallon Total Capacity
- 3.17 Gallons Per Bowl
- Motorized paddles maintain mixing of product



Starlet

Features

- Counter top chiller
- Electronic thermostat
- Weighs 85 lbs



Specifications

Model Numbers

| | H1 | G223 | Starlet |
|-----------------------------|------------------|-------------------|------------------|
| Width (inches) | 20 ¾ | 13 ½ | 24 |
| Depth (inches) | 20 ½ | 17 | 23 |
| Height (inches) | 32 ¼ | 25 | 23 |
| Shelf dimensions (inches) | 17 w x 13 d | ----- | 20 ¾ w x 6 ¾ d |
| Deck dimensions (inches) | 17 ½ w x 9 d | ----- | 20 ¾ w x 6 ½ d |
| Condensing unit size (HP) | 1/6 | 1/10 | 1/8 |
| Refrigerant | R134 | R134 | R134 |
| Power Supply v/Hz/Ph (unit) | 120/60/1 | 120/60/1 | 120/60/1 |
| Amps | 5 | 15 | 10 |
| Watts | 500 | 1500 | 1000 |
| Deck Fans | ----- | ----- | yes |
| Temp Range | 35/42°F or 2/6°C | 39/61°F or 4/16°C | 35/42°F or 2/6°C |

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight. * * *

* Specifications subject to change without prior notice.

Prep



Features

- Stainless steel finish
- Low energy consumption
- Two storage levels
- Adjustable shelves
- Six poly-carbonate inserts included
- Corrosion resistant white interior finish
- Automatic defrost cycle
- Extra deep removable cutting board
- Lockable castors
- Fully mobile

Specifications

Model Number

| | Prep 1 | Prep 2 |
|-----------------------------------|---------------------|--------------------|
| Width (inches) | 44 ½ | 67 ½ |
| Depth (inches) | 32 ½ | 35 ½ |
| Height (inches) | 41 ½ | 41 ½ |
| Storage area (inches) | 25 ¼ w x 27 d x 24h | 48 w x 27 d x 24 h |
| Shelf (inches) | 24 w x 26 d | 23 w x 26 d (x2) |
| Cutting board dimensions (inches) | 44 w x 16 ½ d | 67 ½ w x 19 ½ d |
| Condensing unit size (HP) | ⅙ | ½ |
| Refrigerant | R134 | R134 |
| Power supply v/Hz/Ph | 120/60/1 | 120/60/1 |
| Amps | 20 | 20 |
| Watts | 2000 | 2000 |
| Fan assisted | yes | yes |
| Temperature Range | 33.8°/41°F | 33.8°/41°F |

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

* Specifications subject to change without prior notice.

B1P

Features

- Top shelf is non-refrigerated
- Top hinged glass, hydraulic arm support
- Easy access for loading, setting of display and cleaning
- Euro style front and side glass
- Illuminated stainless steel, display deck and glass shelves
- Rear access to the display for the server
- Main display deck is accessed via a stainless steel pull out drawer from the rear of the case. Magnetic gaskets ensure a perfect seal
- Three level display
- Preparation counter built in
- Automatic defrost
- No plumbing required, auto evaporation of defrost water
- Easy to clean surfaces and attractive lines
- Castors supplied with case
- Fully self contained unit
- Simple plug in operation
- ABS foamed end walls
- Forced air system



Back View

Specifications

Model Numbers

| | B1P |
|------------------------------------|------------------|
| Width (inches) | 50 ½ |
| Depth (inches) | 43 |
| Height (inches) | 51 ½ |
| Top Shelf size (inches) | 46 w x 7 ½ d |
| Bottom Shelf size (inches) | 46 w x 10 d |
| Drawer dimensions (inches) | 37 w x 32 ¾ d |
| Bottom display area total (inches) | 47 w x 32 ¾ d |
| Condensing unit size (HP) | ½ |
| Refrigerant | R404 |
| Power supply v/Hz/Ph | 120/60/1 |
| Amps | 20 |
| Watts | 2000 |
| Temp Range | 34/42°F or 1/6°C |

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

* Specifications subject to change without prior notice.

Kubo 500R

Display Refrigerator

Features

- Adjustable wire shelves
- Hinged doors
- Vertical lights
- Castors supplied with case
- 360° visibility
- Easy to clean
- Automatic defrost
- No drain required
- Stainless steel front



New for 2016

Specifications

Model Number

500R

| | |
|---------------------------|------------------------|
| Width (inches) | 60 |
| Depth (inches) | 28 |
| Height (inches) | 54 |
| Number of shelves | 8 |
| Shelf dimensions (inches) | 23 1/2 w x 15 3/4 d |
| Condensing unit size (HP) | 1 1/8 |
| Refrigerant | R404 |
| Power supply v/Hz/Ph | 120/60/1 |
| Amps | 20 |
| Watts | 2000 |
| Deck fans | Yes |
| Temp range | 36°/ 50° F or 2°/10° C |

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

* Specifications subject to change without prior notice.

Victoria

New for 2016

Features

- Three exhibition levels
- Rear sliding glass doors
- Available in black or stainless finish
- Front access to condensing unit
- Double tempered curved glass
- Castors supplied with case
- Low energy consumption
- Easy to clean
- Automatic defrost cycle
- No drain required
- Stainless steel deck
- Stainless steel front
- Stainless steel shelves
- Static air system
- Wide stainless steel top



Specifications

Model Numbers

| | V-150 | V-200 |
|---------------------------------|-----------------------------------------|-----------------------------------------|
| Width (inches) | 56 ² / ₃ | 74 |
| Depth (inches) | 36 | 36 |
| Height (inches) | 50 | 50 |
| Number of shelves | 4 | 4 |
| Top shelf dimensions (inches) | 24 ¹ / ₄ w x 15 d | 32 ⁷ / ₈ w x 15 d |
| Other shelf dimensions (inches) | 24 ¹ / ₄ w x 17 d | 32 ⁷ / ₈ w x 17 d |
| Condensing unit size (HP) | ¹ / ₄ | ¹ / ₃ |
| Refrigerant | R134A | R134A |
| Power Supply v/Hz/Ph | 120/60/1 | 120/60/1 |
| Amps | 20 | 20 |
| Watts | 2000 | 2000 |
| Deck Fans | 2 | 2 |
| Temp Range | 33/50°F or 2/10°C | 33/50°F or 2/10°C |


Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

* Specifications subject to change without prior notice.

L Symphony

Features

- Anodized finish
- Top hinged, curved front glass
- Glass ends
- Fixed glass shelves (3)
- Dual temperature zones
- Top two shelves are non refrigerated
- Stainless steel display deck
- Granite preparation counter built in
- Pull out drawers (stainless steel)
- Magnetic gasket on drawers
- European finish and appearance
- Castors supplied with case
- Economical system
- Static evaporator system
- Strong construction
- Efficient, quiet system
- Easy to clean surfaces and lines
- Illuminated display
- Fully self contained unit
- Ozone friendly refrigerant
- Simple plug in operation with simple controls
- Thermostat control
- Operator friendly
- Sliding door access at rear of case for server

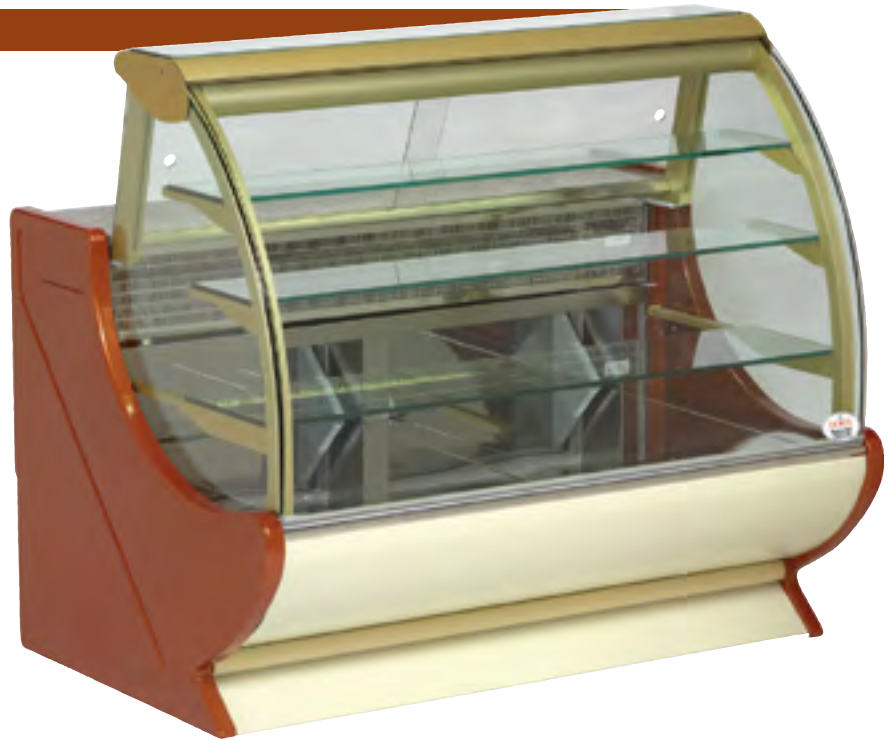

Additional Colors Available

Specifications

Model Numbers

| | L1 | L3 | L5 |
|----------------------------------|-------------------|-------------------|-------------------|
| Width (inches) | 55 ¼ | 87 | 114 ¼ |
| Depth (inches) | 40 | 40 | 40 |
| Height (inches) | 50 | 50 | 50 |
| Number of shelves | 3 | 3 | 3 |
| Top shelf dimensions (inches) | 51 w x 8 ⅔ d | 82 ½ w x 8 ⅔ d | 110 w x 8 ⅔ d |
| Middle shelf dimensions (inches) | 51 w x 8 ⅔ d | 82 ½ w x 8 ⅔ d | 110 w x 8 ⅔ d |
| Lower shelf dimensions (inches) | 51 w x 11 d | 82 ½ w x 11 d | 110 w x 11 d |
| Number of Drawers | 2 | 3 | 4 |
| Drawer dimensions (inches) | 20 ¾ w x 33 ¾ d | 20 ¾ w x 33 ¾ d | 20 ¾ w x 33 ¾ d |
| Condensing unit size (HP) | ¼ | ½ | 1 |
| Refrigerant | R404 | R404 | R404 |
| Power supply v/Hz/Ph | 120/60/1 | 120/60/1 | 120/60/1 |
| Amps | 20 | 20 | 20 |
| Watts | 2000 | 2000 | 2000 |
| Static Refrigeration | Yes | Yes | Yes |
| Temp Range | 36/50°F or 2/10°C | 36/50°F or 2/10°C | 36/50°F or 2/10°C |

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

* Specifications subject to change without prior notice.

L Harmony

Features

- Anodized finish
- Curved front glass
- Glass ends
- Fixed glass shelves (3)
- Glass all around display
- Stainless steel lower display deck
- Sliding glass doors at rear, full size for access
- European appearance
- Castors supplied with case
- Economical system
- Forced air system- uniform cooling on all levels
- Strong construction
- Efficient, quiet system
- Easy to clean surfaces and lines
- Illuminated display (light above each shelf)
- Fully self contained
- Ozone friendly refrigerant
- Simple plug in operation with simple controls
- Thermostat control
- Operator friendly
- No plumbing required



Additional Colors Available

Specifications

Model Numbers

| | L1H | L3H | L5H |
|----------------------------------|------------------|------------------|------------------|
| Width (inches) | 37 | 52 ½ | 83 |
| Depth (inches) | 31 ¼ | 31 ¼ | 31 ¼ |
| Height (inches) | 54 ½ | 54 ½ | 54 ½ |
| Number of shelves | 3 | 3 | 3 |
| Top shelf dimensions (inches) | 35 ½ w x 13 d | 51 w x 13 d | 81 ½ w x 13 d |
| Middle shelf dimensions (inches) | 35 ½ w x 13 ½ d | 51 w x 13 ½ d | 81 ½ w x 13 ½ d |
| Lower shelf dimensions (inches) | 35 ½ w x 16 d | 51 w x 16 d | 81 ½ w x 16 d |
| Condensing unit size (HP) | ¼ | ½ | 1 |
| Refrigerant | R404 | R404 | R404 |
| Power Supply v/Hz/Ph | 120/60/1 | 120/60/1 | 120/60/1 |
| Amps | 20 | 20 | 20 |
| Watts | 2000 | 2000 | 2000 |
| Fan assisted | Yes | Yes | Yes |
| Temp Range | 34/42°F or 1/6°C | 34/42°F or 1/6°C | 34/42°F or 1/6°C |

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

* Specifications subject to change without prior notice.

Bod1



Bodega



Features

- Glass doors
- Interior full length lighting
- Sturdy handle
- Easy to clean interior
- Suitable for refrigerated products
- Efficient, quiet system
- Fully self contained
- Ozone friendly
- Castors supplied with case
- Single temperature or four temperature zones

Bod2

Specifications


Model Numbers

| | Bod1 | Bod2 |
|-----------------------------|-------------------|-------------------|
| Width (inches) | 22 ¾ | 43 |
| Depth (inches) | 25 ½ | 25 ½ |
| Height (inches) | 77 ½ | 77 ½ |
| Capacity: bottle size – 90 | 15x4= 60 | 32x4=128 |
| bottle size – 77 | 24x4=96 | 50x4=200 |
| bottle size – 75 | 24x4=96 | 52x4=208 |
| Condensing unit size (HP) | 1/3 | 1/2 |
| Refrigerant | R134 | R134 |
| Power supply v/Hz/Ph (unit) | 120/60/1 | 120/60/1 |
| Amps | 20 | 20 |
| Watts | 2000 | 2000 |
| Fan assisted | yes | yes |
| Temp Range | 41/60°F or 5/15°C | 41/60°F or 5/15°C |


Plug – each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

* Specifications subject to change without prior notice.

K1T
 4-Sided
 Fixed Shelf Freezer

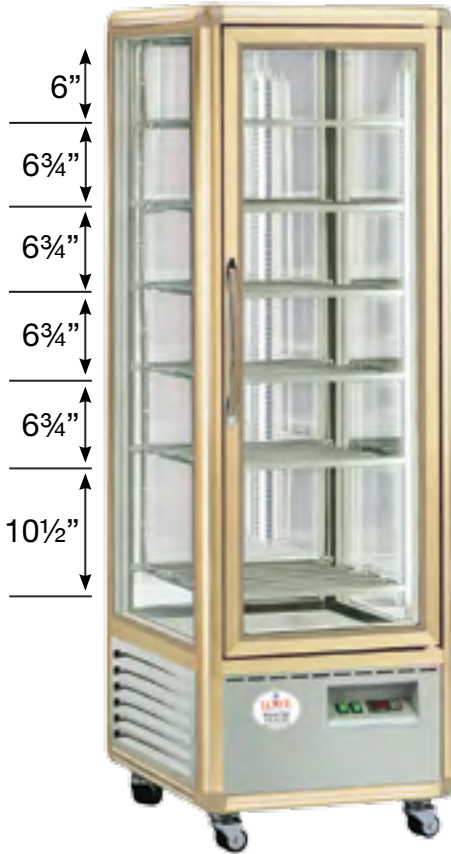

K4TF
 4-Sided
 Fixed Shelf Freezer

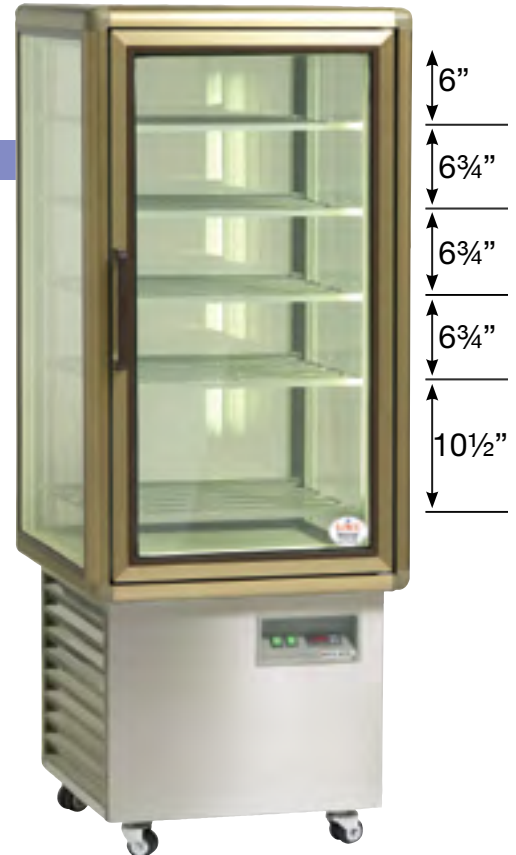

Features

- Anodized Finish
- Glass on all sides
- All around view of product
- Castors supplied with case
- Economical system
- Fixed evaporator shelves
- Efficient, quiet system
- Digital Thermostat control
- No plumbing required

Also Available In Silver

Specifications

Model Numbers

| | K1T | K4TF |
|---------------------------|--------------|--------------|
| Width (inches) | 23 1/2 | 28 |
| Depth (inches) | 25 1/2 | 29 1/2 |
| Height (inches) | 71 1/4 | 70 |
| Number of shelves | 6 | 5 |
| Shelf type | Fixed | Fixed |
| Condensing unit size (HP) | 2/3 | 3/4 |
| Refrigerant | R404 | R404 |
| Power Supply v/Hz/Ph | 120/60/1 | 120/60/1 |
| Amps | 20 | 20 |
| Watts | 2000 | 2000 |
| Fixed shelf evaporator | yes | yes |
| Temp Range | 0°F or -18°C | 0°F or -18°C |

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

* Specifications subject to change without prior notice.

VV17



Features

- Fully adjustable shelves
- 3 shelves standard
- Digital thermostat control
- Vertical lighting
- No plumbing required
- Efficient, quiet system
- Forced air system

Features

- LED lighting
- Anodized finish
- Glass on all sides
- All around view of product
- Castors supplied with case
- Economical system
- Rotating shelves
- Mirrored bottom shelf
- Adjustable shelves
- Efficient, quiet system
- Forced air system
- Digital thermostat control
- No plumbing required
- Gold finish available

K4T

4-Sided
Revolving Shelf Freezer



Specifications

Model Numbers

| | VV17 | K4T |
|---------------------------|-----------------|---------------|
| Width (inches) | 36 | 28 |
| Depth (inches) | 26 | 29 ½ |
| Height (inches) | 60 ½ | 71 ½ |
| Number of shelves | 3 | 6 |
| Shelf type | Adjustable | Revolving |
| Shelf Dimensions | 30 ½ w x 15 ¾ d | 18" Diameter |
| Condensing unit size (HP) | ½ | ¾ |
| Refrigerant | R404 | R404 |
| Power Supply v/Hz/Ph | 120/60/1 | 120/60/1 |
| Amps | 20 | 20 |
| Watts | 2000 | 2000 |
| Fan assisted | yes | yes |
| Temp Range | 0°F or -18°C | -4°F or -20°C |

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

* Specifications subject to change without prior notice.

Features

- LED lighting
- Fully adjustable shelves
- Frost free
- Triple pane glass doors
- Self closing doors
- Stainless steel bottom
- No plumbing required, evaporator condensing pan included
- Automatic defrost cycle
- Forced air system
- Illuminated display
- Castors supplied with case



G1T

G6FT



**Improved Visibility
and Lighting**

Specifications

Model Number

| | G1T | G6FT |
|-----------------------------|----------------|---------------|
| Width (inches) | 30 | 54 |
| Depth (inches) | 29 ½ | 29 ½ |
| Height (inches) | 83 ¾ | 83 ¾ |
| Number of shelves | 4 | 4 |
| Shelf dimensions | 23 w x 20 ½ d | 23 ½ w x 20 d |
| Number of doors | 1 | 2 |
| Canopy dims (inches) | 26 ½ w x 5 ½ h | 52 w x 5 ½ h |
| Condensing unit size (HP) | ½ | 1 |
| Refrigerant | R404 | R404 |
| Power supply v/Hz/Ph (unit) | 120/60/1 | 120/60/1 |
| Amps | 20 | 20 |
| Watts | 2000 | 2000 |
| Fan assisted | Yes | Yes |
| Temp Range | 0°F or -18°C | 0°F or -18°C |

Plug – each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

* Specifications subject to change without prior notice.

E1 / E2
 Display Freezer

Features

- Curved glass front cabinets allow for more product visibility
- 2 sliding glass lids
- Easy access for loading, setting of display and cleaning
- Suitable for all frozen products
- Efficient, quiet system
- Easy to clean surfaces and attractive lines
- Fully self contained unit
- Ozone friendly refrigerant
- Simple plug in operation with simple controls
- Castors supplied with case



Specifications

Model Number

| | E1 | E2 |
|---------------------------|----------------|----------------|
| Width (inches) | 60 | 88 |
| Depth (inches) | 35 ½ | 35 ½ |
| Height (inches) | 40 | 40 |
| Condensing unit size (HP) | ½ | ½ |
| Refrigerant | R404 | R404 |
| Power Supply v/Hz/Ph | 120/60/1 | 120/60/1 |
| Amps | 20 | 20 |
| Watts | 2000 | 2000 |
| Static Refrigeration | Yes | Yes |
| Temp Range | 0° F or -18° C | 0° F or -18° C |

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

* Specifications subject to change without prior notice.

E3

Display Freezer

Features

- Curved glass front cabinets allow for more product visibility
- 2 sliding glass lids
- Easy access for loading, setting of display and cleaning
- Suitable for all frozen products
- Efficient, quiet system
- Easy to clean surfaces and attractive lines
- Fully self contained unit
- Ozone friendly refrigerant
- Simple plug in operation with simple controls
- Castors supplied with case



Specifications

Model Number

E3

| | |
|---------------------------|----------------|
| Width (inches) | 77 |
| Depth (inches) | 34 |
| Height (inches) | 37 |
| Condensing unit size (HP) | ½ |
| Refrigerant | R404 |
| Power Supply v/Hz/Ph | 120/60/1 |
| Amps | 20 |
| Watts | 2000 |
| Static Refrigeration | Yes |
| Temp Range | 0° F or -18° C |

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

* Specifications subject to change without prior notice.

E4
 Display Freezer

Features

- Glass front cabinets allow for more product visibility
- 2 sliding glass lids
- Easy access for loading, setting of display and cleaning
- Suitable for all frozen products
- Efficient, quiet system
- Easy to clean surfaces and attractive lines
- Fully self contained unit
- Ozone friendly refrigerant
- Simple plug in operation with simple controls
- Castors supplied with case



Specifications

Model Number

| | E4 |
|---------------------------|----------------|
| Width (inches) | 77 |
| Depth (inches) | 34 |
| Height (inches) | 39 |
| Condensing unit size (HP) | ½ |
| Refrigerant | R404 |
| Power supply v/Hz/Ph | 120/60/1 |
| Amps | 20 |
| Watts | 2000 |
| Static refrigeration | Yes |
| Temp range | 0° F or -18° C |

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

* Specifications subject to change without prior notice.

Features

- 5 baskets standard
- 2 sliding glass lids
- LED lighting
- Easy access for loading, setting of display and cleaning
- Suitable for all frozen products
- Efficient, quiet system
- Easy to clean surfaces and attractive lines
- Fully self contained unit
- Simple plug in operation with simple controls
- Castors supplied with case

D1C
 Display Freezer

New for 2016



Specifications

Model Number

| | D1C |
|---------------------------|----------------|
| Width (inches) | 58 |
| Depth (inches) | 30 |
| Height (inches) | 34 |
| Condensing unit size (HP) | 1/2 |
| Refrigerant | R134A |
| Power supply v/Hz/Ph | 120/60/1 |
| Amps | 20 |
| Watts | 2000 |
| Static refrigeration | Yes |
| Temp range | 0° F or -18° C |

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

* Specifications subject to change without prior notice.

Kubo 500F

Display Freezer

Features

- Adjustable wire shelves
- Hinged doors
- Vertical lights
- Castors supplied with case
- 360° visibility
- Easy to clean
- Automatic defrost
- No drain required
- Stainless steel front



Specifications

Model Number

500F

| | |
|---------------------------|-----------------|
| Width (inches) | 60 |
| Depth (inches) | 28 |
| Height (inches) | 54 |
| Number of shelves | 8 |
| Shelf dimensions (inches) | 23 ½ w x 15 ¾ d |
| Condensing unit size (HP) | 1 ⅛ |
| Refrigerant | R404 |
| Power supply v/Hz/Ph | 120/60/1 |
| Amps | 20 |
| Watts | 2000 |
| Deck fans | Yes |
| Temp range | 0° F or -18° C |

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

* Specifications subject to change without prior notice.

B2F
 Display Freezer



*Note: No Refrigerated Understorage.

Limited Quantity Available

Features

- Top hinged glass, hydraulic arm support
- Easy access for loading, setting of display and cleaning
- Euro style front and side glass
- Stainless steel interior
- Rear access to the display for the server
- Preparation counter built in
- Easy to clean surfaces and attractive lines
- Castors supplied with case
- Fully self contained unit
- Simple plug in operation with simple controls
- Impact resistant finish
- ABS foamed end walls

Specifications

Model Number

| | B2F |
|---------------------------|--------------|
| Width (inches) | 73 ½ |
| Depth (inches) | 43 |
| Height (inches) | 51 ½ |
| Condensing unit size (HP) | 1 |
| Refrigerant | R404 |
| Power supply v/Hz/Ph | 120/60/1 |
| Amp | 20 |
| Watts | 2000 |
| Deck fans | Yes |
| Temp range | 0°C or -18°C |

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

* Specifications subject to change without prior notice.

F2

Features

- 2 sliding glass lids
- Easy access for loading, setting of display and cleaning
- Excellent vision through top glass
- White interior and exterior
- Suitable for all frozen products
- Efficient, quiet system
- Easy to clean surfaces and attractive lines
- Fully self contained unit
- Ozone friendly refrigerant
- Simple plug in operation with simple controls
- Manual defrost and drain
- One standard basket included
- Impact resistant finish
- Castors supplied with case



Specifications

Model Number

| | F2 |
|-------------------------------|----------------|
| Width (inches) | 47 ¼ |
| Depth (inches) | 24 ¾ |
| Height (inches) | 34 ¼ |
| Inside width (inches) | 42 |
| Inside depth (inches) | 20 |
| Inside height (inches) | 25 |
| Storage capacity (cubic feet) | 12 ¼ |
| Condensing unit size (HP) | ¾ |
| Refrigerant | R404 |
| Power supply v/Hz/Ph | 120/60/1 |
| Amps | 20 |
| Watts | 2000 |
| Deck fans | n/a |
| Temp range | -4° F or -20°C |

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

* Specifications subject to change without prior notice.

DC8
 Dipping Cabinet



Features

- Modern design with high visibility
- Stainless steel preparation counter
- Stainless steel deck
- Silver painted end walls
- Sliding plexi rear doors
- Illuminated logo panel
- Internal lighting for product
- Pricing rails
- Castors supplied with case
- No drain required
- Automatic defrost
- 8 and 12 flavor cabinet available
- Holds 2 ½ gallon size tubs (10 inch deep x 10 diameter)

Specifications

Model Numbers

| | DC8 | DC12 |
|---------------------------|---------------------|---------------------|
| Width (inches) | 50 ¼ | 72 |
| Depth (inches) | 43 ½ | 43 ½ |
| Height (inches) | 56 | 56 |
| Condensing unit size (HP) | ¾ x 2 | ¾ x 2 |
| Refrigerant | R404 | R404 |
| Power supply v/Hz/Ph | 120/60/1 | 120/60/1 |
| Amps | 30 | 30 |
| Watts | 3000 | 3000 |
| Deck fans | Yes | Yes |
| Temp range | 3/-4°F or -16/-20°C | 3/-4°F or -16/-20°C |

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

* Specifications subject to change without prior notice.

G12

Gelato-Italian Ice Cream



Features

- Modern design – high visibility
- Painted gray ABS end walls
- Stainless steel preparation counter
- Fully mobile
- Castors supplied with case
- Stainless steel bins
- Stainless steel front
- Sliding rear doors
- Full length illumination of product
- Pricing rails
- Illumination panel for product transparencies

Specifications

Model Number

G12

| | |
|---------------------------|-------------------|
| Width (inches) | 50 ¼ |
| Depth (inches) | 44 ¾ |
| Height (inches) | 54 ¾ |
| Condensing unit size (HP) | ¾ |
| Refrigerant | R404 |
| Power supply v/Hz/Ph | 220v single phase |
| Amps | 30 |
| Watts | 3000 |
| Deck fans | Yes |
| Temp range | -4°F or -20°C |

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

* Specifications subject to change without prior notice.

SS2P

Two Flavor Soft Serve Ice Cream Machine

Features

- Small foot print, saves valuable floor space
- Easy cleaning and operation
- No installation required, plug it in and it is ready to go
- Castors supplied with case
- Soft serve mix not included
- Sanitized prior to each rental
- Serves two flavors plus a swirl option.
- Overnight switch to keep product refrigerated when not in use
- Automatic shut off when product is low



Specifications

Model Numbers

| | SS2P |
|---------------------------|-------------------|
| Width (inches) | 21 |
| Depth (inches) | 27 ½ |
| Height (inches) | 52 |
| Condensing unit size (HP) | 1 ⅛, 1/8 |
| Refrigerant | R404 |
| Power supply v/Hz/Ph | 220V single phase |
| Amps | 30 |
| Watts | 3000 |

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

* Specifications subject to change without prior notice.

200 GBT

Fixed Shelves



Features

- Gold or silver anodized finish
- Glass walls
- Smooth finish. Rounded corners
- Static evaporator system
- Rapid pull down time
- Strong construction
- Efficient, quiet system
- Easy to clean surface and lines
- Illuminated display
- Fully self contained unit
- Ozone friendly refrigerant
- Simple plug in operation with simple controls
- Operator friendly
- Thermostat control
- Fixed shelves are 7 ¼ inches apart

H4IB

Storage Freezer



Features

- Adjustable shelves
- Glass display
- Counter top unit
- Efficient, quiet system

Specifications

Model Numbers

| | 200 GBT | H4IB |
|---------------------------|--------------|--------------|
| Width (inches) | 47 ½ | 23 ½ |
| Depth (inches) | 19 ½ | 20 ¼ |
| Height (inches) | 28 | 26 ½ |
| Condensing unit size (HP) | ⅓ | ¼ |
| Refrigerant | R404 | R134 |
| Power supply v/Hz/Ph | 120/60/1 | 120/60/1 |
| Amps | 20 | 20 |
| Watts | 2000 | 2000 |
| Fan assisted | no | yes |
| Temp range | 0° F - 18° C | 0° F - 18° C |
| Fixed shelf evaporator | yes | no |

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

* Specifications subject to change without prior notice.



Penguin 1

Single Bowl
Frozen Drink Display

Penguin 2

Double Bowl
Frozen Drink Display



Features

- One or two bowl frozen drink display
- Full access to all the components for quick and easy maintenance
- Simple bowl removal for easy cleaning
- One compressor for each bowl
- Manual control of the thickness of the drink
- Quick product preparation
- Internal illumination system

H2

Features

- Efficient, quiet system
- Perfect for under counter use



Specifications

Model Numbers

| | H2 | Penguin 1 | Penguin 2 |
|---------------------------|----------------|---------------|---------------|
| Width (inches) | 19 ½ | 7 ¾ | 15 ⅓ |
| Depth (inches) | 21 ½ | 17 | 17 |
| Height (inches) | 32 ¾ | 34 ¼ | 34 ¼ |
| Bowl capacity in liters | n/a | 12 | 12 |
| Bowl capacity in gallons | n/a | 3.17 | 3.17 |
| Condensing unit size (HP) | ¼ | ¼ | ½ |
| Refrigerant | R134 | R134 | R134 |
| Power supply v/Hz/Ph | 120/60/1 | 120/60/1 | 120/60/1 |
| Amps | 20 | 20 | 20 |
| Watts | 2000 | 2000 | 2000 |
| Temp range | -4° F / -20° C | frozen drinks | frozen drinks |

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

* Specifications subject to change without prior notice.

Isola 4H

Features

- Electrically raised canopy
- Castors supplied with case
- Divider bars included
- Stainless steel option available
- Adjustable water temperature control
- Fitted drain
- Heat lamps for additional heating
- 'Low water level' alarm
- Serving trays optional
- Digital control panel
- Pans available upon request
- Internal basin in AISI stainless steel
- Accepts deep or shallow pans
- Different configurations available
- Gastronorm pans available upon request



Isola 4H

Lid Electronically Lowered.

Specifications

Model Numbers

| | Isola 4H | Isola 4HS/S |
|--------------------------|----------------------|----------------------|
| Width (inches) | 56 | 59 ¼ |
| Depth (inches) | 29½ | 29 ½ |
| Height (inches) top down | 45 ¼ | 45 |
| Height (inches) top up | 59 | 59 |
| Power supply v/Hz/Ph | 120/60/1 | 120/60/1 |
| Amps | 30 | 30 |
| Watts | 3000 | 3000 |
| Temp range | 100/194°F or 38/90°C | 100/194°F or 38/90°C |

Plug - each unit requires a single dedicated power supply.

* Specifications subject to change without prior notice.

B1H

Features

- Top hinged glass, hydraulic arm support
- Easy access for loading, setting of display and cleaning
- Euro style front and side glass
- Illuminated stainless steel, perforated display deck
- Rear access to the display for the server
- Preparation counter built in
- Automatic 'low water level' power cut-off
- Easy to clean surfaces and attractive lines
- Castors supplied with case
- Fully self contained unit
- Rheostat control for heat/light
- Simple plug in operation with simple controls
- Adjustable water temperature control
- Water inlet (1/2 inch) and drain fitting (1 1/2 inch)
- Impact resistant finish
- Stainless steel deck
- ABS foamed end walls
- Divider bars for Gastronorm pans available
- Heating area can be configured several ways using divider bars. Heating area dimensions: 42 x 25 1/2 (inches)
- Gastronorm pans available upon request



Specifications

Model Number

| | B1H |
|------------------------------------------------------------|----------------------|
| Width (inches) | 51 |
| Depth (inches) | 43 |
| Height (inches) | 51 1/2 |
| Power Supply v/Hz/Ph | 220/60/1 |
| Amps | 30 |
| Watts | 3000 |
| Water Temperature Range | 167/176°F or 75/80°C |
| Deck Temperature | 146°F or 63°C |
| Plug - each unit requires a single dedicated power supply. | |

* Specifications subject to change without prior notice.

BR13H

Features

- 4 Adjustable heated shelves
- Sliding glass rear doors
- Vertical lights
- Castors supplied with case
- No drain required
- Modern design
- 360° visibility
- Stainless steel front
- Stainless steel front
- Easy to clean



Specifications

Model Number

BR13H

| | |
|---------------------------------|----------------------|
| Width (inches) | 53 |
| Depth (inches) | 29 ½ |
| Height (inches) | 54 ¼ |
| Top shelf dimensions (inches) | 50 w x 11 d |
| Other shelf dimensions (inches) | 50 w x 11 d |
| Power Supply v/Hz/Ph | 120/60/1 |
| Amps | 30 |
| Watts | 3000 |
| Temperature Range | 140/176°F or 60/80°C |

Plug - each unit requires a single dedicated power supply.

* Specifications subject to change without prior notice.



MCT
4 Burner

Features

- Stainless steel table with electric 4 burner ceramic cook top
- Locking castors included
- Under cabinet storage shelf
- Optional attached mirror for high visibility



MCT
Back View - Under Storage



MCTM
With Mirror

Specifications

Model Numbers

| | MCT | MCTM |
|----------------------|----------|----------|
| Width (inches) | 60 | 60 |
| Depth (inches) | 30 ¼ | 30 ¼ |
| Height (inches) | 36 | 97 |
| Power Supply v/Hz/Ph | 220/60/1 | 220/60/1 |
| Amps | 30 | 30 |
| Watts | 3000 | 3000 |

Plug - each unit requires a single dedicated power supply.

* Specifications subject to change without prior notice.

CO25 Convection Oven

Features

- Convection oven with two adjustable shelves
- Holds ½ pan: 18 x 14 ½ (inches) - not included
- Oven is attached to rolling stand
- Rolling stand has six shelves for sheet pans
- Sheet pans for stand available upon request
- Trays for oven available upon request

Specifications

Model Number

CO25

| | |
|------------------------|-----------------------|
| Width (inches) | 28 ½ |
| Depth (inches) | 28 |
| Height (inches) | 53 ¾ |
| Inside width (inches) | 18 ½ |
| Inside depth (inches) | 14 ½ |
| Inside height (inches) | 10 5/8 |
| Power Supply v/Hz/Ph | 120/60/1 |
| Amps | 20 |
| Watts | 2000 |
| Temperature Range | 120/480°F or 49/249°C |

Plug - each unit requires a single dedicated power supply.

* Specifications subject to change without prior notice.



MW Microwave



Specifications

Model Number

MW

| | |
|----------------------|----------|
| Width (inches) | 24 |
| Depth (inches) | 18 |
| Height (inches) | 14 |
| Power Supply v/Hz/Ph | 120/60/1 |
| Amps | 10 |
| Watts | 1000 |

Plug - each unit requires a single dedicated power supply.

* Specifications subject to change without prior notice.

Top2
 Dual burner cook top



Features

- 2 electric burners
- Compact and lightweight

DW
 Dual lamp display warmer



Features

- Holds a 12 x 20 (inches) Pan
- Pan not included

Specifications

Model Numbers

| | Top2 | DW |
|----------------------|----------|----------|
| Width (inches) | 22 ½ | 13 |
| Depth (inches) | 14 | 19 |
| Height (inches) | 3 | 24 ¼ |
| Power Supply v/Hz/Ph | 120/60/1 | 120/60/1 |
| Amps | 20 | 20 |
| Watts | 2000 | 2000 |

Plug - each unit requires a single dedicated power supply.

* Specifications subject to change without prior notice.

200 Hot

(Self Serve) Counter Top



Features

- Warming lamps above each shelf
- Sturdy construction designed for easy access of product
- Self serve open access

Specifications

Model Number

| | 200 Hot |
|----------------------|---------------------|
| Width (inches) | 35 ½ |
| Depth (inches) | 21 |
| Height (inches) | 28 |
| Power Supply v/Hz/Ph | 120/60/1 |
| Amps | 15 |
| Watts | 1500 |
| Temperature Range | 95/160°F or 35/71°C |

Plug - each unit requires a single dedicated power supply.

* Specifications subject to change without prior notice.

HSD2



Features

- Hard coated aluminum heat shelf
- Tempered glass sides for maximum visibility
- Heavy duty stainless steel construction for base, sides and top
- Thermostat controlled heat for base and rear overhead heat source.

Specifications

Model Number

| | HSD2 |
|----------------------|----------|
| Width (inches) | 36 |
| Depth (inches) | 28 |
| Height (inches) | 29 ¾ |
| Power Supply v/Hz/Ph | 120/60/1 |
| Amps | 20 |
| Watts | 2000 |

Plug - each unit requires a single dedicated power supply.

* Specifications subject to change without prior notice.



I1 / I3
Display Ice Tray

MS12
Electric Meat Slicer
12" Cutting Wheel



200 Dry
Self-Serve Counter Top Display

- Gold or silver anodized finish
- Easy to clean surfaces and lines
- Glass walls
- Multi purpose
- Illuminated display
- Smooth finish
- Rounded corners
- Strong construction
- Simple plug In operation with simple controls



Specifications

Model Numbers

| | I1 | I3 | MS12 | 200 Dry |
|----------------------|-----------|-----------|-------------|----------------|
| Width (inches) | 40 | 64 | 23 | 35 ¼ |
| Depth (inches) | 22 | 22 | 18 | 21 |
| Height (inches) | 7 | 7 | 16 | 28 |
| Power Supply v/Hz/Ph | n/a | n/a | 120/60/1 | 120/60/1 |
| Amps | n/a | n/a | 15 | 5 |
| Watts | n/a | n/a | 1500 | 500 |

Plug - each unit requires a single dedicated power supply.

* Specifications subject to change without prior notice.

MSU

*Mobile Sink Unit
For Hands and Utensils Only*

Features

- Hand sink cart with 2-compartment sink
- Two 5 gallon water tanks
- Two 7 gallon waste water tanks
- 2½ gallon hot water heater
- Soap dispenser and paper towel holder included
- Durable polyethylene construction
- Castors supplied with case



Specifications

Model Number

MSU

| | |
|----------------------|------------------------------|
| Width (inches) | 41 |
| Depth (inches) | 32 ½ |
| Height (inches) | 45 ½ |
| Power Supply v/Hz/Ph | 120/60/1 |
| Amps | 15 |
| Watts | 1500 |
| Fresh water capacity | 2 x 5 gallon or 18.92 liters |
| Waste tank capacity | 2 x 7 gallon or 26.49 liters |

Plug - each unit requires a single dedicated power supply.

* Specifications subject to change without prior notice.

HWS

Two Person Accessible Hand Washing Station

Features

- 1,408 single uses (22-gallon fresh water capacity; 24-gallon gray water capacity)
- Two 30-ounce soap dispensers and four 250-sheet built-in paper towel dispensers
- Fits inside most portable restrooms for easy transport to job sites
- Built-in lift handles provide added mobility for positioning once on-site.

Specifications

Model Number

HWS

| | |
|----------------------|---------------------------|
| Width (inches) | 26 ½ |
| Depth (inches) | 21 ½ |
| Height (inches) | 61 |
| Fresh water capacity | 22 gallon or 83.28 liters |
| Waste tank capacity | 24 gallon or 90.85 liters |

* Specifications subject to change without prior notice.





PTS
 Stainless Steel Prep Table with Shelf

Features

- Stainless steel work surface
- Model with shelf available



PT
 Stainless Steel Prep Table

Specifications

Model Numbers

| | PT4 / PT4S | PT5 / PT5S | PT6 / PT6S |
|-----------------|------------|------------|------------|
| Width (inches) | 48 | 60 | 72 |
| Depth (inches) | 30 | 30 | 30 |
| Height (inches) | 35 | 35 | 35 |

* Specifications subject to change without prior notice.

Sinks



SSB3



SSB1

Features

- Stainless steel bowl sink
- Plumbing required
- Single bowl and three bowl sinks available
- Water inlet (1 inch) and drain fitting (1¾ inch)

Specifications

Model Numbers

| | SSB1 | SSB3 |
|-----------------|------|------|
| Width (inches) | 23 ½ | 84 |
| Depth (inches) | 24 ½ | 24 ½ |
| Height (inches) | 40 | 40 |

* Specifications subject to change without prior notice.

Ready Built Cold Rooms

Features

- “All-Weather” exterior
- Internal light
- Internal “glow in the dark” safety handle
- Easily made mobile
- Refrigerator & freezer temps available
- NSF approved “3-tier” racking included
- Secure, simple temperature control
- Non-slip floor
- Ramp included
- Quiet operation of ETL approved condensing unit
- Health and safety code compliant
- Fork lift friendly
- Lockable door - self closing!
- Simply hardwire to your generator or existing power!
- Strong hinge system
- External gauge displaying box temperature



Specifications

| | |
|--------------------------|----------|
| External Width (inches) | 94 ¼ |
| External Length (inches) | 117 ¾ |
| External Height (inches) | 93 |
| Power Supply v/Hz/Ph | 220/60/1 |
| Amps | 30 |

* Specifications subject to change without prior notice.



Modular walk-in cold and freezer rooms.



From the world's largest sporting events to state fairs, festivals, care centers, emergency relief, construction renovation, and so much more, LOWE Cold Rooms provide the perfect refrigerated storage solution.

Mobile & remote, climate controlled modular refrigeration / freezer cold rooms engineered for quiet efficiency even in the most challenging environments.

8ft by 8ft Modular Walk-in Cold Room. (smallest size available)
 Length can be increased in 2ft increments.
 Width can be increased in 8ft increments with interior walls.

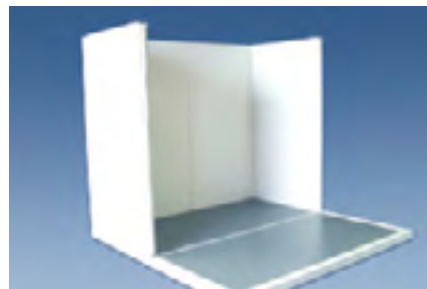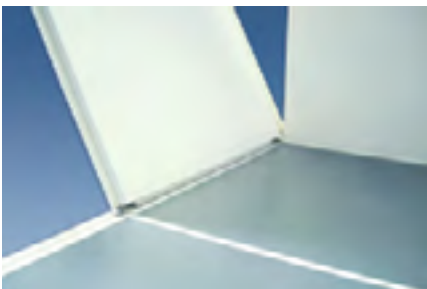

Quickly built on-site • Dual temperature • Indoor and outdoor use • Pallet size doors available.

With the largest modular cold room rental fleet in the world, LOWE Refrigeration's extensive logistical program enables us to meet your unique event requirements and ensure successful on time delivery and installation to your event.

Take advantage of our freight savings!

A large number of modular cold rooms can be loaded onto a single trailer.

This creates an efficiency and economy that ready built rooms can't duplicate.



Our steel frame leveling system allows us to place cold rooms almost anywhere, and create efficiency by placing refrigerated storage in convenient locations.



Our quick & efficient on-site build process saves you time and money.



Tie Down Straps can be placed over modular cold rooms to provide extra security in high wind environments. Strapping uses a ratchet and stake system that allows each unit to be pinned in place. This system includes ratchets, pin stakes, stake puller, mid and end straps.

Cold Storage – Where you need it. When you need it.



Build on pristine grass in front of clubhouse.
 No forklift needed.



Inside or outside of any structure.
 No fumes. Almost silent!



No vehicular access - no problem. Modular cold rooms can be taken through 3ft door to build inside.



Build on a cart path or remote site with ease!

Specifications

| | | |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|--|
| Power Requirements | 220v / 60Hz / Single Phase / 30 Amp Breaker (Note: LOWE can supply a splitter box allowing 2 motors to run off a single power supply.) | |
| Drain | Not Required | |
| Inside Door Handle | Glow in the dark | |
| Strip Curtain | Fitted at door entry | |
| Color | White | |

| Dimensions | Internal | External |
|-------------------|-----------------|-----------------|
| Width (inches) | 88 | 95 |
| Height (inches) | 80 | 87 |
| Length (inches) | 88 | 95 |

8ft x 8ft is the smallest size available.

Length increases by increments of 2ft. Width increases by increments of 8ft with interior walls.

Call to reserve your customized cold room!

* Specifications subject to change without prior notice.

LOWE Modular Cold Room Features & Benefits

LOWE can support events anywhere in North America with modular cold rooms suitable for indoor and outdoor use.

Our modular cold rooms offer a clean, safe and quite refrigeration/frozen storage option in almost any environment.

- uneven or sloping ground
- on a cart path
- on the beach
- on dirt, grass, gravel or asphalt
- on a platform
- under a bridge
- inside a building
- inside a room
- on a rooftop
- at limited access or remote locations

Chefs and Concessions enjoy having their refrigerated storage when they need it – right next to them!

Our modular cold rooms are also available for beer cooler configuration, a climate controlled preparation, storage room or office.

(Note: Our offices in Europe and Asia provide a similar service.)



Cold Room used for keg storage.





LOWE

WORLDWIDE REFRIGERATION



Lowe Refrigeration Ltd
Unit 37 Marchington Industrial Estate
Uttoxeter, Staffordshire
England, ST14 8LP
Tel. +44 (0) 1283 820 717
Fax. +44 (0) 1283 820 687

Lowe Refrigeration Inc
105 Cecil Court
Fayetteville, Georgia 30214 USA
Tel: 770 461 9001
Toll Free: 844 655 1320
Fax: 770 461 8020

Lowe Refrigeration Ltd
Unit 1B Excelsior Park
Canyon Road
Netherton Industrial Estate
Wishaw, Scotland, ML2 OEG
Tel. +44 (0) 1698 372 902
Fax. +44 (0) 1698 230 790

Head Office Lowe Refrigeration Ltd
Unit J, Knockmore Industrial Estate
Lisburn, Co. Antrim
Northern Ireland, BT28 2EJ
Tel. +44 (0) 2892 604 619
Fax. +44 (0) 2892 660 849

Lowe Refrigeration Pte
#04-03,
178 Paya Lebar Road
Singapore, 409030
Tel. +65 6284 1552
Fax. +65 6285 7978

Lowe Refrigeration Ltd
c/o Invest Northern Ireland
Dubai Internet City
117 IBM Building
PO Box 9284
Dubai, UAE
Tel. +971 5286 93695

Lowe Refrigeration Deutschland GmbH
Hohlstück 4
56368 Klingelbach
Germany
Tel. +49 (0) 6486 9039 680
Fax. +49 (0) 6486 9039 681

Lowe Refrigeration Ltd
Room 11, 14th floor, Wah Wai Ind Centre
38-40 Au Pui Wan Street, Fo Tan, Sha Tin
New Territories, Hong Kong
Tel. +852 26595300
Fax. +852 26595700

Lowe Refrigeration Italia srl
Italy
Tel: +39 33 9654 6260